


Main Features

- For use on flat bed CNC lathes.
- 3 piece face gear allows turret to be indexed without lifting.
- Clamping through Cam and Disc spring ensures consistent rigid clamping.
- Fast unidirectional indexing.
- Option with internal coolant allows use of BWS drills.

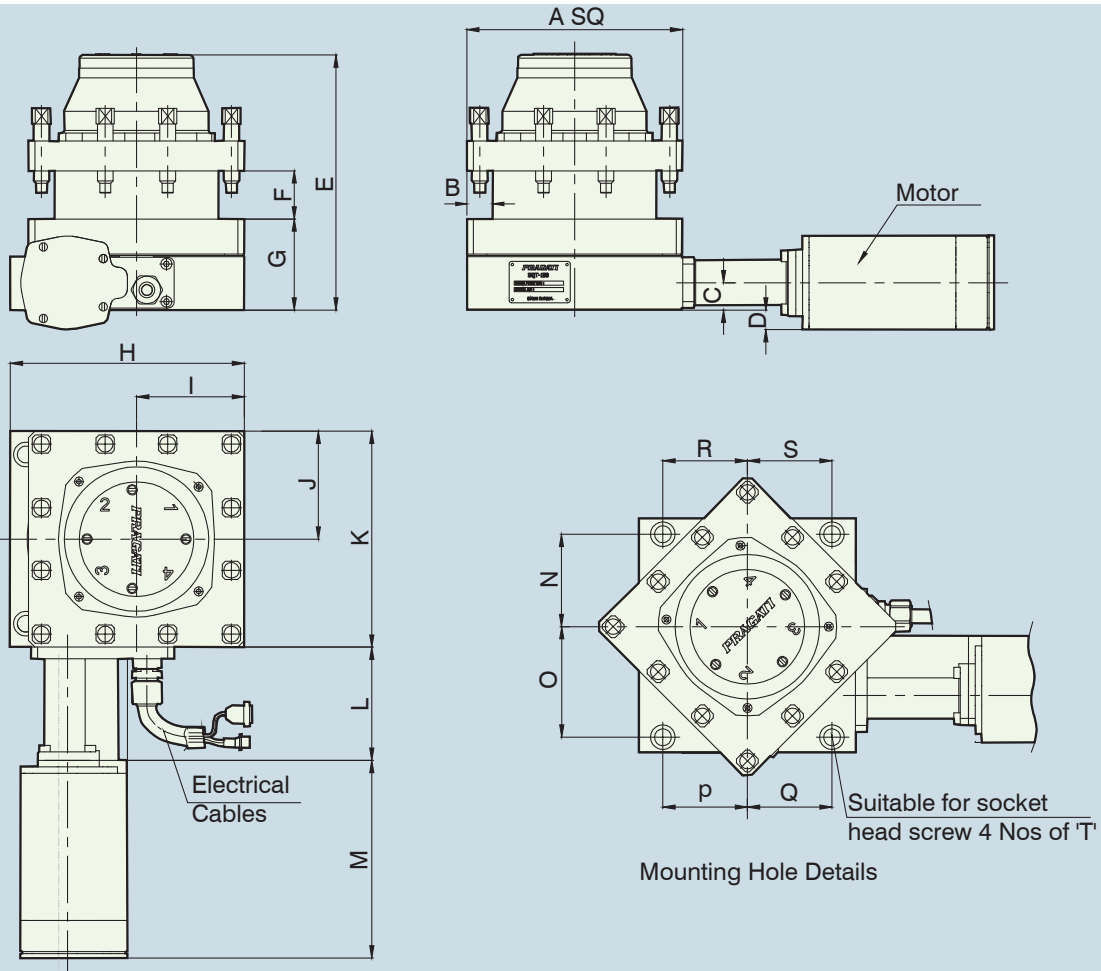

Series	Model	Lathe	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	Wt.Kg
130	134-51	0625	134	15	15.5	20.5	160	29	51	138	67	67	134	83.5	147.5	58	62	47	43	52	48	M8	14
	136-57	6125	136	16	21.5	14.5	166	31	57	148	68	68	136	83.5	147.5	57	69	51	57	51	57	M10	15
160	166-70	6132	166	20	21	23.5	196	40	70	180	83	83	166	87	149	71	85	65	65	65	65	M12	25
	166-81	6140	166	25	21	23.5	202	37	81	192	83	83	177	87	149	71	97	71	81	71	81	M12	26
	166-115	6150	166	25	55	10.5	236	37	115	192	83	83	177	87	149	71	97	71	81	71	81	M12	31
	166-121	6150	166	25	61	16.5	242	37	121	192	83	83	177	87	149	71	97	71	81	71	81	M12	32
	166-125	6150	166	25	65	20.5	246	37	125	192	83	83	177	87	149	71	97	71	97	71	81	M12	32
	163-110	6132	163	22	21	23.5	198	40	70	175	81.5	81.5	177	87	149	65.5	80.5	61.5	64.5	61.5	64.5	M12	24
	180-110	21180	180	28	58	5.5	239	45	110	192	90	90	184	87	149	78	90	78	74	78	74	M12	38
190	192-81	6140	192	25	30.5	14	219	41	81	196	96	96	192	86	149	81	87	76	76	76	76	M12	35
	192-110	6150	192	25	59.5	15	248	41	110	196	96	96	192	86	149	81	87	76	76	76	76	M12	41
	192-125	6150	192	25	74.5	30	263	41	125	196	96	96	192	86	149	81	87	76	76	76	76	M12	43
200	200-110	6163	200	25	30.5	14	234	40	110	200	100	100	200	86	149	89	89	65	65	75	75	M12	44
	200-120	6163	200	32	30.5	14	244	50	120	200	100	100	200	86	149	89	89	65	65	75	75	M12	47